



## Filter Wavelength Division Multiplexer (FWDM Series)

Rev 10


The Filter Wavelength Division Multiplexer series is based on environmentally stable thin film filter technology. The devices combine or separate light at different wavelength in a wide wavelength range. They offer very low insertion loss, low polarization dependence, high isolation and excellent environmental stability. High power handling capability can be achieved through unique pigtail processing and high quality AR coating. These components have been extensively used in EDFAs, Raman amplifiers, WDM networks and fiber optical instruments.

### Specifications

Parameter	Unit	Value
Pass Band	Wavelength Range	nm
	Max. Insertion Loss	dB
	Min. Isolation	dB
Reflection Band	Wavelength Range	nm
	Max. Insertion Loss	dB
	Min. Isolation	dB
Min. Return Loss	dB	50
Max. Polarization Dependent Loss	dB	0.1
Max. Thermal Stability	dB/°C	0.005
Max. Optical Power (CW)	mW	300
Max. Tensile Load	N	5
Fiber Type		HI 1060
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

\*IL is 0.5 dB higher, RL is 5 dB lower for each connector added.

### Package Dimensions

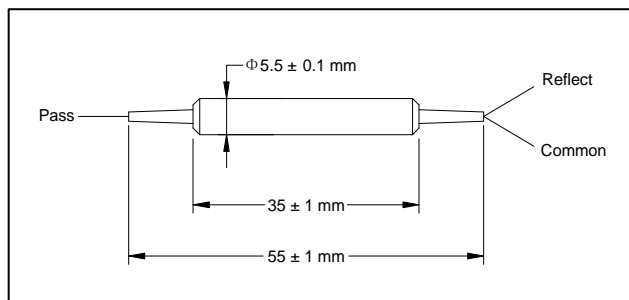

### Ordering Information

**FWDM-①①①①-②-③-④**

①①①①: Wavelength  
9806 - 980 Pass/1060 Reflect  
SSSS - Specify

②: Connector Type  
1 - FC/UPC  
2 - FC/APC  
3 - SC/UPC  
4 - SC/APC  
N - None  
S - Specify

③: Fiber Jacket  
B - 250 μm bare fiber  
L - 900 μm loose tube  
S - Specify

④: Fiber Length  
1 - 1.0 m  
S - Specify