



## 1064 nm Polarization Insensitive Optical Circulator (FCIR Series)

Rev 11


The Optical Circulator is a compact, high performance lightwave component that routes incoming signals from Port 1 to Port 2, and incoming Port 2 signals to Port 3. The component provides high isolation, low insertion loss, low PDL, low PMD and excellent environmental stability.

### Specifications

Parameter	Unit	Value
Center Wavelength ( $\lambda_c$ )	nm	1064
Operating Wavelength Range	nm	$\lambda_c \pm 5$
Typ. Insertion Loss, 23 °C	dB	2
Max. Insertion Loss, 23 °C	dB	2.2
Min. Isolation, $\lambda_c$ , 23 °C, all polarization states	dB	20
Min. Crosstalk	dB	45
Min. Return Loss	dB	50
Max. Polarization Dependent Loss, 23 °C	dB	0.2
Max. Polarization Mode Dispersion	ps	0.1
Max. Optical Power (Continuous Wave)	mW	300
Max. Tensile Load	N	5
Operating Temperature	°C	0 to +30
Storage Temperature	°C	-40 to +85
Fiber Type		HI 1060 fiber
Package Dimensions	mm	34 × 8.4 × 8.4

\*IL is 0.5 dB higher and RL is 5 dB lower for each connector added.

### Package Dimensions

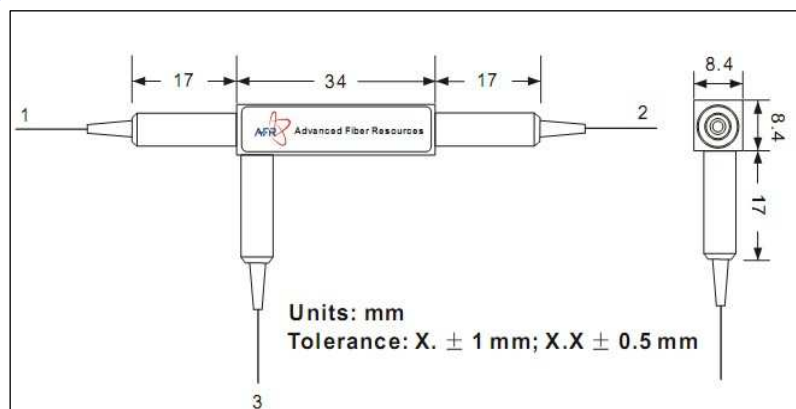

### Ordering Information

#### FCIR-①①-②-③-④

①①: Wavelength	②: Connector Type	③: Fiber Jacket	④: Fiber Length
06 - 1064 nm	1 - FC/UPC	B - 250 $\mu$ m bare fiber	1 - 1.0 m
SS - Specify	2 - FC/APC	L - 900 $\mu$ m loose tube	S - Specify
	3 - SC/UPC	S - Specify	
	4 - SC/APC		
	N - None		
	S - Specify		