



Single Mode Wavelength Division Multiplexers (980/1060) (WDM Series)

Rev 11


The Single Mode Wavelength Division Multiplexers combine or separate light at different wavelengths. They offer very low insertion loss, low polarization dependence, high isolation and excellent environmental stability. These components have been extensively used in EDFA, CATV, WDM networks and fiber optics instrumentation.

Specifications

Parameter	Unit	Value
Center Wavelength (λ_c)	nm	980/1060
Operating Wavelength	nm	$\lambda_c \pm 5$
Min. Isolation	dB	13
Max. Insertion Loss	dB	0.35
Max. Polarization Dependent Loss	dB	0.1
Thermal Stability	dB/°C	≤ 0.002 over -5°C to $+70^\circ\text{C}$
Min. Return Loss	dB	60
Directivity	dB	60
Max. Optical Power (Continuous Wave)	mW	300
Configuration		1×2 or 2×2
Package Dimensions		250 μm bare fiber, $\Phi 3.0 \times 55$ mm 900 μm loose tube, $\Phi 3.0 \times 72$ mm 3 mm cable, $90 \times 16 \times 9$ mm
Operating Temperature	°C	-5 to $+70$
Storage Temperature	°C	-40 to $+85$

*IL is 0.5 dB higher, RL is 5 dB lower for each connector added.

Package Dimensions

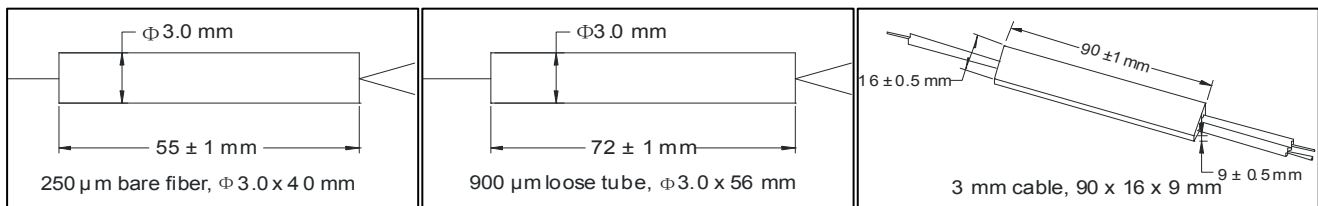

Ordering Information

WDM-①-②②②②-③-④-⑤-⑥

①: Configuration

1 - 1×2

2 - 2×2

②②②②: Wavelength

9806 - 980 & 1060 nm

③: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

④: Fiber Type

B - 250 μm bare fiber

L - 900 μm loose tube

C - 3 mm cable

S - Specify

⑥: Fiber Option

H - HI 1060 Flex fiber(N.A. 0.20)

O - OFS 980 fiber

⑤: Fiber Length

1 - 1.0 m

S - Specify