



(1+1)×1 Multimode Pump & Signal Combiner (MMPC Series)

Rev 11H

Description

The (1+1)×1 Multimode Pump & Signal Combiner enables highly efficient combining of the powers from 1 multimode pump diode and a signal beam from the signal fiber into a double clad output fiber. The Pump & Signal Combiner is also available for different fiber types.

Key Features

- High Coupling Efficiency
- Low Insertion Loss

Applications



- Fiber Laser
- EDFA

Specifications

Parameter	Unit	Value
Product Type	-	(1+1)×1
Pump Wavelength Range	nm	900 - 1000
Signal Wavelength Range	nm	1060
Fiber Type for Input (Pump Channel)	μm	105/125, 0.15 NA or 0.22 NA
Fiber Type for Input (Signal Channel)	μm	6/125 DCF, 10/125 DCF
Fiber Type for Output	μm	6/125 DCF, 10/125 DCF
Signal Channel Insertion Loss	dB	< 0.50
Typ. Pump Efficiency	%	94
Min. Pump Efficiency	%	92
Max. Input Pump Power	W	1 × 10 1 × 30
Package Dimensions	mm	P1: 50 (L) × 5 (W) × 5 (H) P2: 70 (L) × 12 (W) × 8 (H)
Operating Temperature	°C	0 to + 65
Storage Temperature	°C	- 40 to + 85

¹Mode number summation of all input fibers should be less than that of output fiber.

Package Dimensions

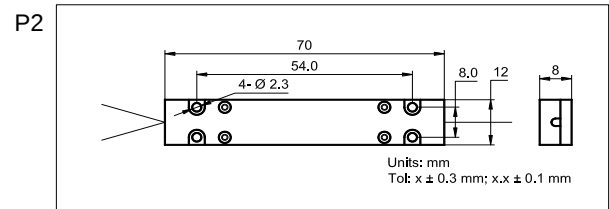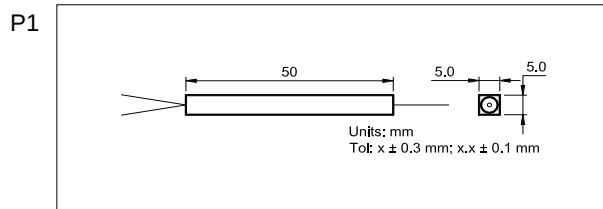

Ordering Information

MMPC-(1+1)×1-①①-②②②-③③-④④-⑤⑤-⑥-⑦

①①: Signal Wavelength

②②②: Pump Wavelength

③③: Fiber Type for Pump Input

06 - 1060 nm

915 - 915 nm

15 - 105/125, 0.15 NA

SS - Specify

975 - 975 nm

22 - 105/125, 0.22 NA

SSS - Specify

④④: Fiber Type for Signal Input
06 - 6/125 DCF, 0.14/0.46 NA
10 - 10/125 DCF, 0.08/0.46 NA
SS - Specify

⑤⑤: Fiber Type for Output
06 - 6/125 DCF, 0.14/0.46 NA
10 - 10/125 DCF, 0.08/0.46 NA
SS - Specify

⑥: Fiber Length
Q - 0.75 m
1 - 1.0 m
S - Specify

⑦: Package Type
1 - P1
2 - P2