



High Power (18+1)×1 Pump & Signal Combiner (HPPC Series)

REV11 A

Description

The high power (18+1)×1 pump & signal combiner enables highly efficient combining of the powers from up to 18 multimode pump diodes and a signal laser into a double cladding output fiber. The device can handle more than 1kW combined power. Available for different fiber types.

Key Features

- High Power Handling
- High Coupling Efficiency
- Proprietary Fiber Tapering Technique


Applications

- kW Class Fiber Laser
- kW Class Fiber Amplifier

Specifications

Parameter	Unit	Value
Product Type		(18+1) × 1
Pump Wavelength Range	nm	915-980
Signal Wavelength Range	nm	650
Fiber Type for Input (Pump Channel)		105/125 (0.15 or 0.22 NA)
Fiber Type for Input (Signal Channel)		20/125, NA = 0.08/0.46
Fiber Type for Output		Nufern LMA-GDF-20/400-M, 0.06/0.46 NA
Max. Input Pump Power	W	18 × 60
Max. Signal Channel Insertion Loss	dB	2.0
Typ. Pump Efficiency	%	99
Min. Pump Efficiency	%	97
Package Dimensions	mm	100 (L) × 15 (W) × 10 (H)
Operating Temperature (Active Cooling Required)	°C	-5 to +65
Storage Temperature	°C	-40 to +85

Package Dimensions

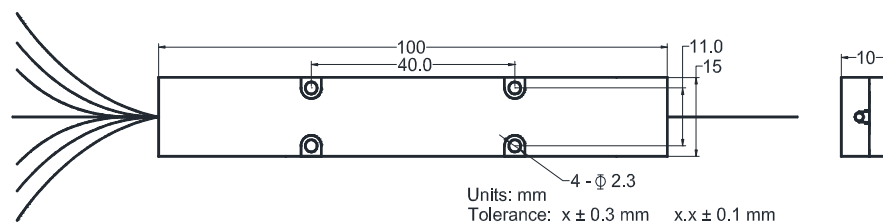

Ordering Information

HPPC-(18+1)×1-①①-②②-③③-④④

①①: Fiber Type for Pump Input

15- 105/125 (0.15 NA)

22- 105/125 (0.22 NA)

SS - Specify

②②: Fiber Type for Signal Input

20 - 20/125 SC, NA = 0.08/0.46

SS - Specify

SS - Specify

③③: Fiber Type for Output

20 - Nufern LMA-GDF-20/400-M

30 - Nufern LMA-GDF-30/250-M

SS - Specify

④④: Fiber Length

Q - 0.75 m

S - Specify