

Polarization Maintaining Dense Wavelength Division Multiplexer (PMDWDM Series)

Description

Rev 11

The PMDWDM series is designed and manufactured according to Telcordia standard and ITU standard, it preserves the polarization of optical signals. The devices use environmentally stable thin film filter and advanced packaging technology to achieve wide passband, low insertion loss, high channel isolation, excellent environmental stability and high extinction ratio. They can be used individually to perform single channel add or drop function or can be used in DWDM systems and fiber sensor systems, etc.


Specifications

Parameter	Unit	Value	
		200 GHz	100 GHz
Filter Type			
Pass Band	Center Wavelength		ITU Grid
	Min. Bandwidth @ 0.5 dB	0.5	0.16
	Typ. Bandwidth @ 0.5 dB	0.7	0.4
	Max. Insertion Loss @ Common → Pass	1.0	1.2
	Typ. Insertion Loss @ Common → Pass	0.8	1.0
	Min. Channel Isolation @ Common → Pass	25	25
	Typ. Channel Isolation @ Common → Pass	30	30
Reflection Band	Max. Insertion Loss @ Common → Reflect	0.5	0.5
	Typ. Insertion Loss @ Common → Reflect	0.3	0.3
	Min. Channel Isolation @ Common → Reflect	12	12
	Typ. Channel Isolation @ Common → Reflect	15	15
	Typ. Extinction Ratio @ 23 °C	22	22
	Min. Extinction Ratio @ 23 °C	20	20
	Directivity	50	50
	Min. Return Loss	50	50
	Center Wavelength Stability	nm/°C	0.002
	Thermal Stability	dB/°C	0.005
	Max. Optical Power	mW	300
	Fiber Type	-	PM Panda Fiber
	Max. Tensile Load	N	5
	Operating Temperature	°C	- 5 to + 70
	Storage Temperature	°C	- 40 to + 85

¹IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower for each connector added.

¹Connector key is aligned to slow axis.

Package Dimensions

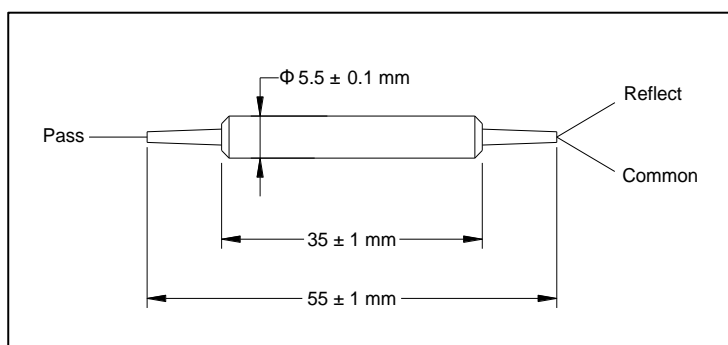

Ordering Information

PMDWDM-①-②②-③-④-⑤

①: Channel Spacing

1 - 100 GHz

2 - 200 GHz

②②: ITU Grid

③: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

④: Fiber Jacket

B - 250 μ m Panda Fiber

L - 900 μ m Loose Tube

S - Specify

⑤: Fiber Length

Q - 0.75 m

S - Specify