



Polarization Beam Combiner/Splitter (PBC/PBS Series)

Spec Review No.: SR17735

Description


The Polarization Beam Combiner/Splitter is a compact high performance light wave component that combines two orthogonal polarization signals into one output fiber. The most common application is to combine the light of two pump lasers into one single fiber to double the pump power in EDFA or Raman Amplifier. The device can also be used as a beam splitter.

Specifications

Parameter	Unit	Value
Operating Center Wavelength	nm	1064, 1310
Operating Wavelength Range	nm	± 50
Max. Insertion Loss	dB	0.6
Min. Extinction Ratio (for splitter only)	dB	20
Min. Return Loss	dB	50
Directivity	dB	50
Max. Optical Power (continuous wave)	mW	300
Fiber Type	-	PM Panda Fiber for Ports 1 & 2, SMF-28 or PM Panda Fiber for Port 3
Max. Tensile Load	N	5
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85

¹IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower for each connector added. Connector key is aligned to slow axis.

Package Dimensions

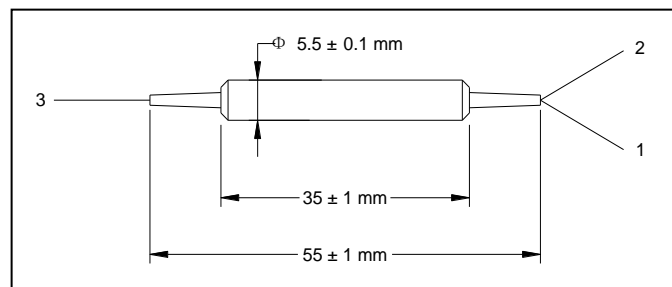

Ordering Information

PBC-①①①①-②-③-④-⑤-⑥

PBS-①①①①-②-③-④-⑤-⑥

①①①①: Wavelength	③: Connector Type	④: Fiber Type	⑤: Fiber Type for Port 3
1064 - 1064 nm	1 - FC/UPC	B - 250 μm Bare Fiber	1 - SMF-28
1310 - 1310 nm	2 - FC/APC	L - 900 μm Loose Tube	2 - Slow axis aligned 45° to Port 1
SS - Specify	3 - SC/UPC	S - Specify	3 - Slow axis aligned to Port 1
	4 - SC/APC		S - Specify
	N - None		
②: Grade			⑥: Fiber Length
P - Premium			Q - 0.75 m
			S - Specify