



Filter Wavelength Division Multiplexer (FWDM Series)

Rev 11

Description

The Filter Wavelength Division Multiplexer is based on environmentally stable thin film filter technology. The devices combine or separate light at different wavelengths in a wide wavelength range. They offer very low insertion loss, low polarization dependence, high isolation and excellent environmental stability. High power handling capability can be achieved through unique pigtail processing and high quality AR coating. These components have been extensively used in EDFAs, Raman amplifiers, WDM networks and fiber optical instruments.

Key Features

- Low Polarization Dependent Loss
- Low Insertion Loss
- High Isolation

Applications


- EDFA
- Raman Amplifier
- Fiber Optic Instruments

Specifications

Parameter		Unit	Value		
Pass Band	Wavelength Range	nm	1270 - 1350 (1530 - 1600)	1450 - 1490 (1530 - 1580)	1500 - 1520 (1530 - 1570)
	Typ. Insertion Loss	dB	0.4	0.4	0.5
	Max. Insertion Loss	dB	0.6	0.6	0.7
	Typ. Isolation	dB	35	30	35
	Min. Isolation	dB	30	25	30
Reflection Band	Wavelength Range	nm	1530 - 1600 (1270 - 1350)	1530 - 1580 (1450 - 1490)	1530 - 1570 (1500 - 1520)
	Typ. Insertion Loss	dB		0.3	
	Max. Insertion Loss	dB		0.5	
	Typ. Isolation	dB		15	
	Min. Isolation	dB		12	
Min. Return Loss		dB		50	
Max. Polarization Dependent Loss		dB		0.1	
Typ. Polarization Dependent Loss		dB		0.05	
Thermal Stability		dB/°C		0.005	
Max. Optical Power		mW		300	
Max. Tensile Load		N		5	
Fiber Type		-		SMF-28	
Operating Temperature		°C		- 5 to + 70	
Storage Temperature		°C		- 40 to + 85	

¹IL is 0.3 dB higher, RL is 5 dB lower for each connector added.

Package Dimensions

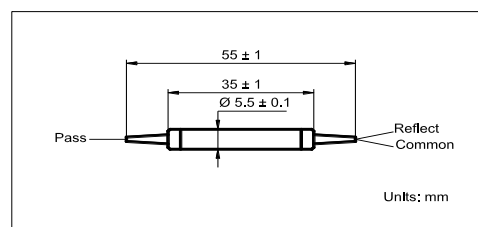

Ordering Information

FWDM-①①①①-②-③-④

①①①①: Wavelength

3155 - 1310 Pass/1550 Reflect

5531 - 1310 Reflect/1550 Pass

4855 - 1480 Pass/1550 Reflect

5548 - 1480 Reflect/1550 Pass

5155 - 1510 Pass/1550 Reflect

5551 - 1510 Reflect/1550 Pass

SSSS - Specify

②: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

③: Fiber Jacket

B - 250 µm Bare Fiber

L - 900 µm Loose Tube

S - Specify

④: Fiber Length

1 - 1.0 m

S - Specify