



High Power (18+1)×1 Pump & Signal Combiner (HPPC Series)

Rev 11

Description

The High Power (18+1)×1 Pump & Signal Combiner enables highly efficient combining of the powers from up to 18 multimode pump diodes and a signal laser into a double cladding output fiber. The pump and signal combiner can handle more than 1 kW combined power. Available for different fiber types.

Key Features

- High Power Handling
- High Coupling Efficiency


Applications

- Fiber Laser

Specifications

Parameter	Unit	Value
Product Type	-	(18+1)×1
Pump Wavelength Range	nm	915 - 980
Signal Wavelength Range	nm	650
Fiber Type for Input (Pump Channel)	-	105/125, 0.15 or 0.22 NA
Fiber Type for Input (Signal Channel)	-	20/125, 0.08/0.46 NA
Fiber Type for Output	-	Nufern LMA-GDF-20/400-M, 0.06/0.46 NA
Max. Input Pump Power	W	18 × 60
Max. Signal Channel Insertion Loss	dB	2
Typ. Pump Efficiency	%	99
Min. Pump Efficiency	%	97
Package Dimensions	mm	100 (L) × 15 (W) × 10 (H)
Operating Temperature (Active Cooling Required)	°C	- 5 to + 65
Storage Temperature	°C	- 40 to + 85

Package Dimensions

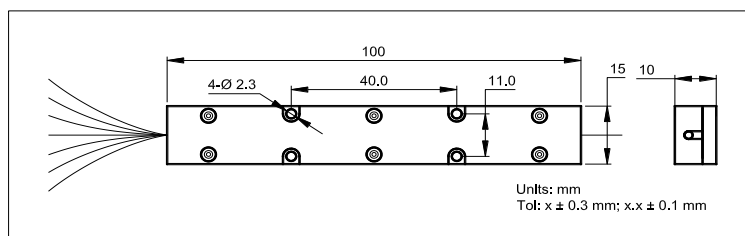

Ordering Information

HPPC-(18+1)×1-①①-②②-③③-④

①①: Fiber Type for Pump Input

15 - 105/125, 0.15 NA

22 - 105/125, 0.22 NA

SS - Specify

②②: Fiber Type for Signal Input

20 - 20/125 SC, 0.08/0.46 NA

SS - Specify

SS - Specify

③③: Fiber Type for Output

20 - Nufern LMA-GDF-20/400-M

30 - Nufern LMA-GDF-30/250-M

SS - Specify

④: Fiber Length

Q - 0.75 m

S - Specify