



## High Power ClearCut™ Fiber Bragg Grating (HPCG Series)

Rev11 D

The High Power ClearCut™ Fiber Bragg Grating products are low insertion loss fiber bragg gratings for high power fiber lasers. With AFR's ClearCut designing and packaging, the devices can handle kilowatt level pump power and signal power. Custom configurations available.

### Key Features

- High Power Handling
- ClearCut Grating Designing
- Outstanding Reliability
- Available for Customizing


### Applications

- Continuous Wave Fiber Laser
- High Power Fiber Laser
- Pulsed Fiber Laser

### Specifications

Parameter	Unit	Value			
Center Wavelength	nm	1030,1064,1070,1080			
Tolerance on Center Wavelength	nm	1.0			
Max. Wavelength Mismatch (OC Relative HR)	nm	0.2			
High Reflector (HR) / Output Coupler (OC)		HR		OC	
Peak Reflectivity	%	≥99.0		(5.0 - 30.0) ± 2.0	
Reflection Bandwidth at 95%	nm	1.5~4.0		/	
Reflection Bandwidth at 50%	nm	/		0.2~2.0	
Tolerance on Reflection Bandwidth	nm	0.1~0.4		0.1~0.2	
Min. Side Mode Suppression Ratio	dB	20		10	
Fiber Core/Cladding Dimension	μm	10/125	14/250	20/400	25/400
Min. Core Signal Power Handling	W	300	800	1500	2000
Min. Clad Pump Power Handling	W	450	1200	2000	
Fiber Type		PM or Non-PM			
Package Dimensions	mm	60 (L) × 12 (W) × 5 (H)			
Cooling Bottom Plate Temperature	°C	≤25			
Storage Temperature	°C	-40 to +85			

### Package Dimensions

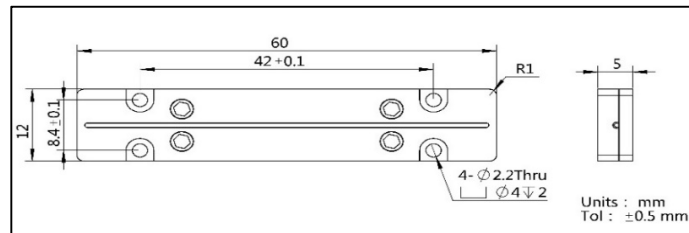

### Ordering Information

**HPCG-①①①①.①-②.②/②.②-③③-④④/④④④④-⑤-P⑥⑥⑥⑥-⑦**

①①①①.①: Center Wavelength      ②.②/②.②: Reflectivity Bandwidth HR/OC      ③③: Peak Reflectivity of OC  
 XXXX.X - XXXX.X nm      X.X/X.X - X.X nm HR/X.X nm OC      XX - XX%  
 SSSS.S - Specify      S.S/S.S - Specify      SS - Specify

④④/④④④④: Fiber Core/Cladding Dimension      ⑤: Fiber Type      ⑥⑥⑥⑥: Pump Power Handling      ⑦: Pigtails Length (Each Side)  
 XX/XXX - XX μm/XXX μm      N - Non-PM      XXXX - XXXX W      A - 1 m      B - 1.2 m  
 SS/SSS - Specify      P - PM      SSSS - Specify      C - 1.4 m      S - Specify

\*ClearCut is a product trade mark of AFR representing an unique technology used in its FBG products.