

Polarization Maintaining Filter Coupler Module (1 x 3) (PMFCM Series)

Description

Rev 11


The PMFCM series is manufactured by using advanced technology to allow the input signal to be splitted into multi channels at a given splitting ratio with high extinction ratio, low excess loss, good uniformity, low wavelength dependance and low temperature dependance. It can be widely used in fiber sensors, amplifiers, lasers, etc.

Specifications

Parameter	Unit	Value
Center Wavelength (λ_c)	nm	1310, 1550
Operating Wavelength Range	nm	$\lambda_c \pm 30$
Max. Insertion Loss	dB	5.8
Typ. Insertion Loss	dB	5.6
Max. Wavelength Dependent Loss	dB	0.5
Typ. Wavelength Dependent Loss	dB	0.3
Max. IL Uniformity	dB	0.6
Min. Return Loss	dB	50
Directivity	dB	50
Min. Extinction Ratio	dB	23
Max. Temperature Dependent Loss	dB/°C	0.006
Fiber Type	-	PM Panda Fiber
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85
Package Dimensions	mm	160 x 140 x 10

*IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower for each connector added. Connector key is aligned to slow axis.

Package Dimensions

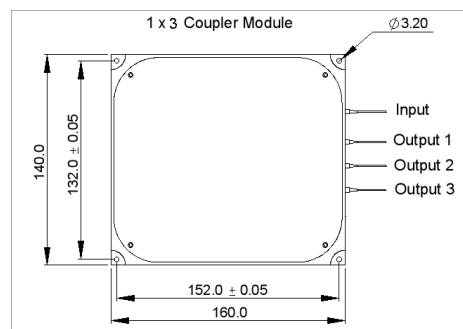

Ordering Information

PMFCM-①①-②②②②-③③-④-⑤-⑥-⑦

①①: Center Wavelength

②②②②: Configuration

③③: Splitting Ratio

④: Connector Type

31 - 1310 nm

0103 - 1 x 3

EV - Evenly Splitted

1 - FC/UPC

55 - 1550 nm

SS - Specify

2 - FC/APC

3 - SC/UPC

⑤: Fiber Type

⑥: Fiber Length

⑦: Working Axis

4 - SC/APC

B - 250 μ m Panda Fiber

H - 0.5 m

F - Fast Axis Blocked

N - None

L - 900 μ m Loose Tube

S - Specify

S - Slow Axis Blocked

S - Specify