

C Band Red/Blue Wavelength Division Multiplexer (CRBWDM Series)

Description

Rev 11


The C Band Red/Blue Filter Wavelength Division Multiplexer is a micro optics device based on environmentally stable thin film filter technology. It is used to separate or combine Red band wavelength signals and Blue band wavelength signals in C band range in DWDM systems. The components are characterized with wide passband, low insertion loss, high return loss, excellent environmental stability and high power handling capability.

Specifications

Parameter	Unit	Value
Pass Band	Wavelength Range	1530 - 1542 (1548 - 1560)
	Max. Insertion Loss	0.6
	Typ. Insertion Loss	0.4
	Min. Isolation	22
	Typ. Isolation	25
Reflection Band	Wavelength Range	1548 - 1560 (1530 - 1542)
	Max. Insertion Loss	0.5
	Typ. Insertion Loss	0.3
	Min. Isolation	12
	Typ. Isolation	14
Min. Return Loss	dB	50
Max. Polarization Dependent Loss	dB	0.10
Typ. Polarization Dependent Loss	dB	0.05
Thermal Stability	dB/°C	0.005
Max. Optical Power (Continuous Wave)	mW	300
Max. Tensile Load	N	5
Fiber Type	-	SMF-28 Fiber
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85

¹IL is 0.3 dB higher, RL is 5 dB lower for each connector added.

Package Dimensions

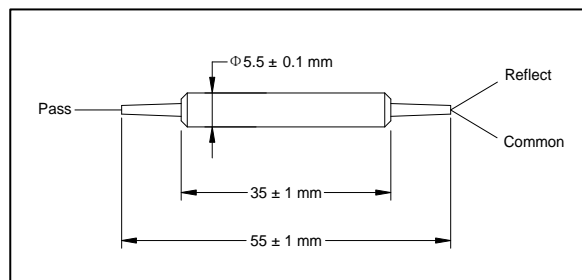

Ordering Information

CRBWDM-①①①①-②-③-④

①①①①: Wavelength

4248 - 1530 - 1542 Pass/1548 - 1560 Reflect

4842 - 1530 - 1542 Reflect/1548 - 1560 Pass

SSSS - Specify

②: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

③: Fiber Type

B - 250 μm Bare Fiber

L - 900 μm Loose Tube

S - Specify

④: Fiber Length

1 - 1.0 m

S - Specify