



1064 nm Polarization Maintaining Isolator (PMI Series)

Rev 11B

Description

The 1064 nm Polarization Maintaining Isolator is a micro optics device with low insertion loss, high isolation, high return loss, high extinction ratio and excellent environmental stability and reliability. This fiber isolator is ideal for amplifiers, fiber lasers and test instrument applications.

Key Features

- High Extinction Ratio
- Low Insertion Loss
- High Isolation

Applications

- Fiber Lasers
- Amplifiers
- Instrumentation

Specifications


Parameter	Unit	Value			
Stage	-	Single Stage		Dual Stage	
Grade	-	Grade P	Grade A	Grade P	Grade A
Center Wavelength (λ_c)	nm	1064			
Typ. Peak Isolation	dB	38	36	55	52
³ Min. Isolation, λ_c , 23 °C, ≤ 30 mW	dB	35	32	45	42
Typ. Insertion Loss, λ_c	dB	1.5	1.6	2.4	2.6
Max. Insertion Loss, λ_c	dB	2.0	2.2	3.4	3.6
Min. Extinction Ratio, 23 °C	dB	20	18	20	18
Min. Return Loss (Input/Output)	dB	55/50	55/50	55/50	55/50
Max. Average Optical Power	mW	300			
Max. Peak Power for ns Pulse	kW	10			
Max. Tensile Load	N	5			
Fiber Type	-	PM 980 Panda Fiber			
Operating Temperature	°C	- 5 to + 50			
Storage Temperature	°C	- 40 to + 85			

¹IL is 0.5 dB higher, RL is 5 dB lower, and ER is 2 dB lower for each connector added.

²Connector key is aligned to slow axis.

³The isolation is related to the input power. Please inform us when you need high isolation and operate above 30 mW.

Package Dimensions

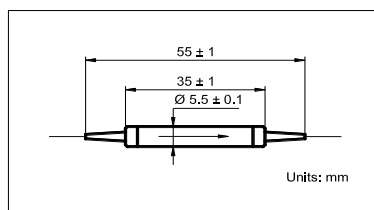

Ordering Information

PMI-06-①-②-③-④-⑤-⑥-⑦

①: Stage

②: Grade

③: Connector Type

④: Fiber Jacket

1 - Single Stage

P - Premium

1 - FC/UPC

4 - SC/APC

B - 250 μ m Bare Fiber

2 - Dual Stage

A - A Grade

2 - FC/APC

N - None

L - 900 μ m Loose Tube

3 - SC/UPC

S - Specify

S - Specify

⑤: Fiber Length

Q - 0.75 m

S - Specify

⑥: Working Axis

F - Fast Axis Blocked

B - Both Axis Working

⑦: Power Type

P - Pulsed

C - Continuous Wave